

NOTES:

ISS	REVISED BY:	REVISION DATE	ECD #

MATERIAL:

HEAD - ALUMINUM, 22 KSI YIELD  
 CABLE - STEEL (GAC)  
 SLEEVES - ALUMINUM  
 D-RING - STEEL


DIMENSIONS: INCHES

MECHANICAL RATING:

ANCHOR RATING WORKING LOAD (RWL) BASED ON INSTALLATION  
 IN CLASS 5 SOIL (BLOW COUNT 24-40 PER ASTM D-1586),  
 AND MIN. INSTALL DEPTH.

ULT (LB)	RWL (LB)	SOIL BEARING AREA (IN <sup>2</sup> )	MIN INSTALL DEPTH (IN)
6,000	3,000	9.95	42

CABLE ULTIMATE BREAKING STRENGTH (GAC):  
 3/16 (.1875) 3,700 LBS

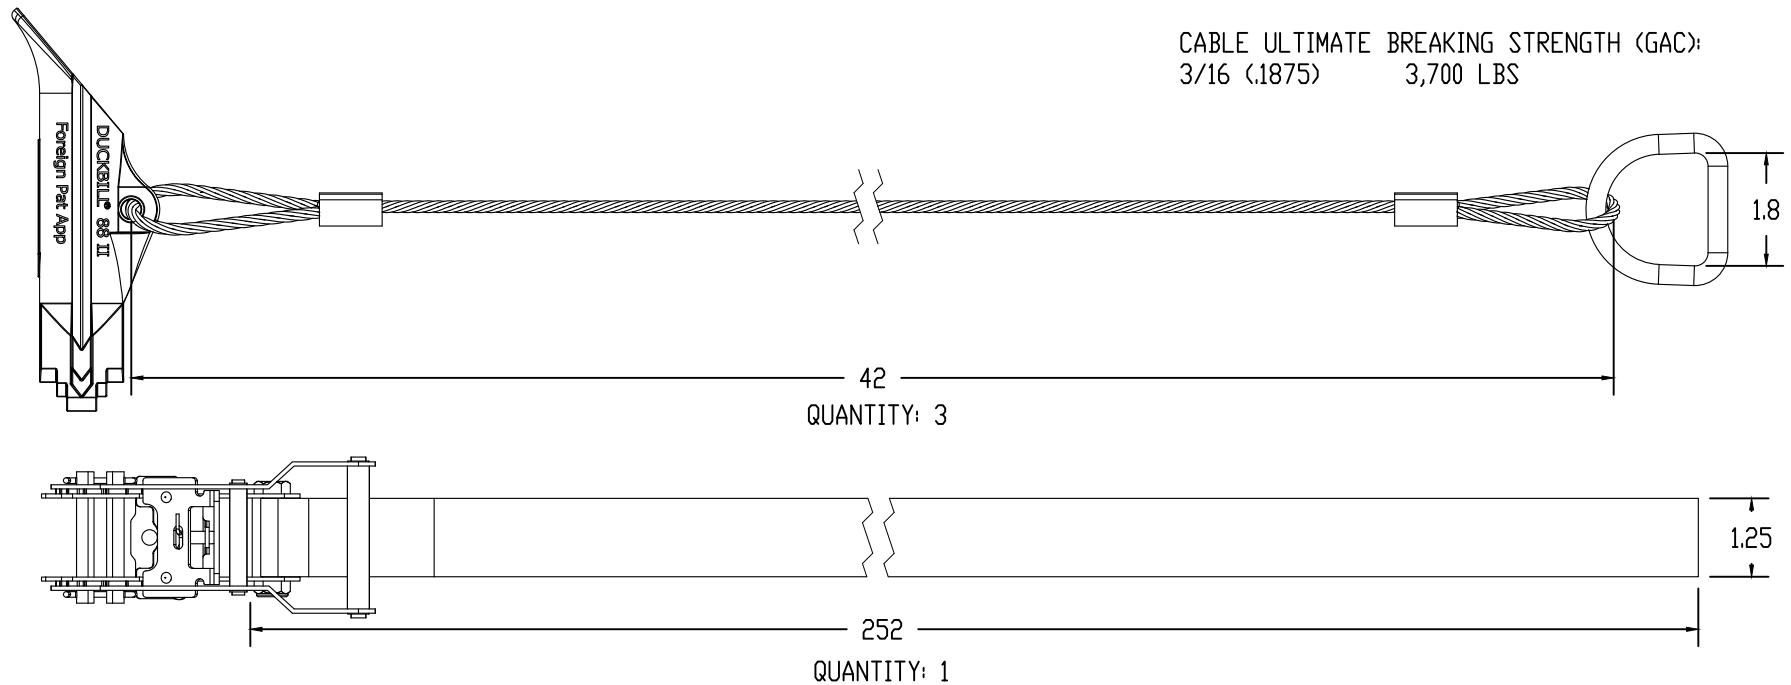

CATALOG NUMBER: K088A25GX042S3X		
SHEET NAME: Sheet1	1 OF 1	
DRAWING DESCRIPTION: 88-RBK ROOT BALL KIT		
DRAWN BY: DH	DATE: 05/21/20	APPROVED: DR

**MacLean**  
POWER SYSTEMS

WWW.MACLEANPOWER.COM

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.